




MCU

20		Not to be used
19		Lock
18		(+) Lock
17		(+) 24 V DC
16		Inner impulse
15		(-) 0 V DC
14		(+) 24 V DC
13		Presence monitoring
12		Key impulse *
11		Presence impulse 2
10		C-switch
9		Presence impulse 1
8		(-) 0 V DC
7		(+) 24 V DC
6		Side presence monitoring
5		Outer impulse
4		Side presence impulse 2
3		Stop impulse
2		Side presence impulse 1
1		(-) 0 V DC

* Key impulse can generate a battery wake up if mains power is off and battery is fitted.

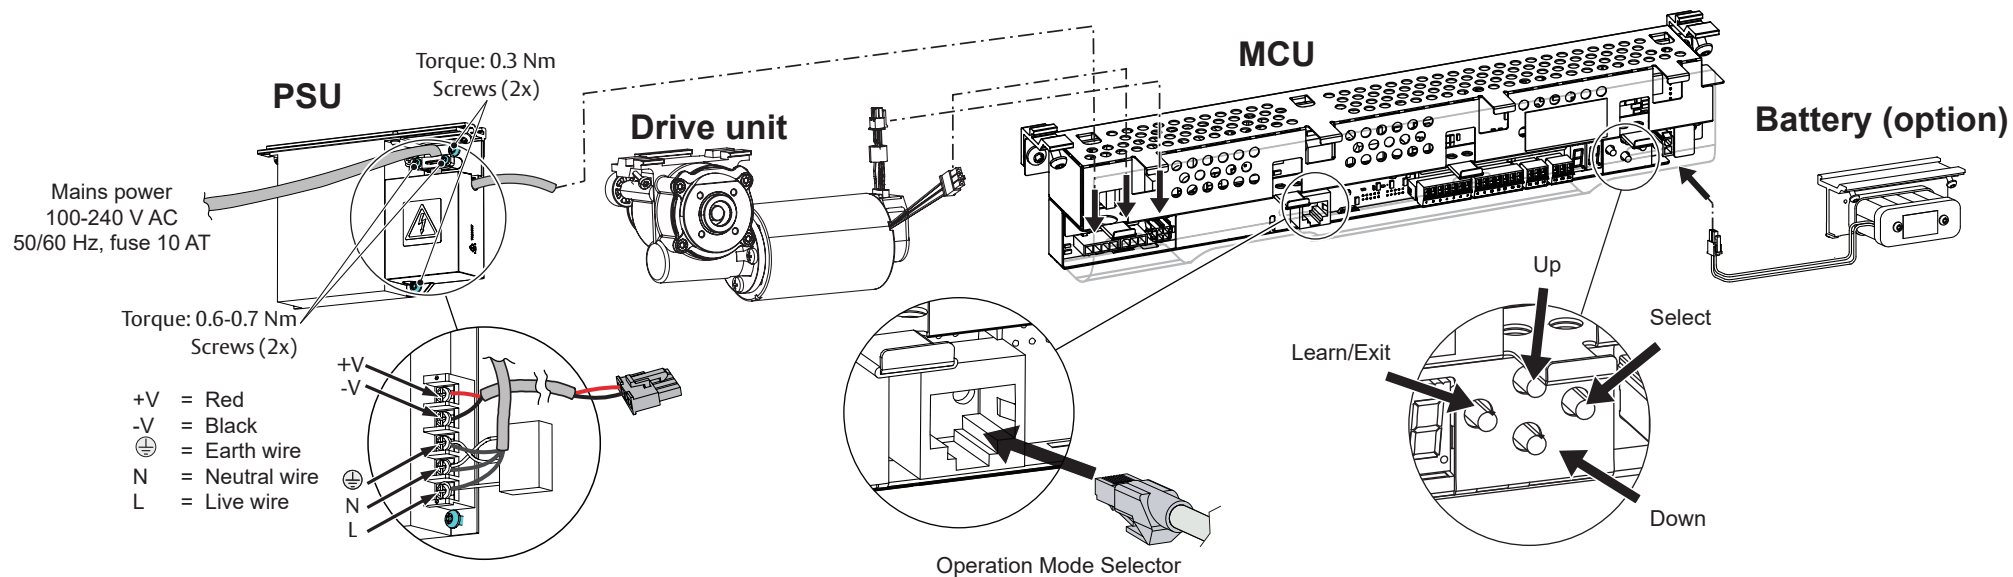


Control unit

Connection drawing for SL300

ASSA ABLOY

4.0 1021513-en

CONNECTION OF ACTIVATION UNITS TO MCU

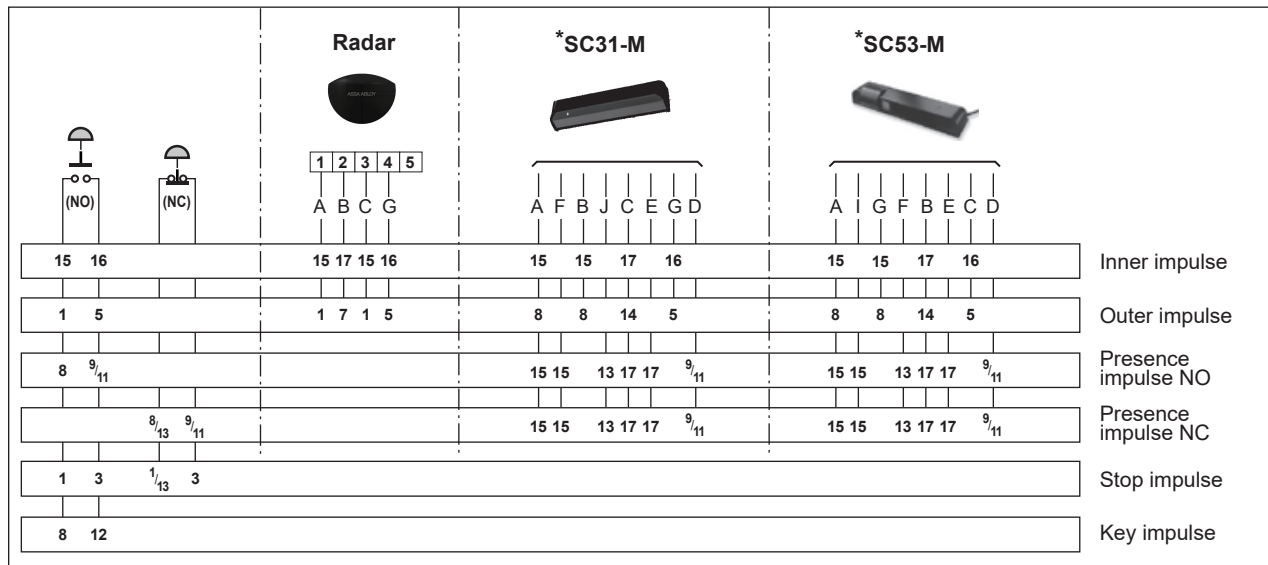


* Can be monitored


** Connect if inner/outer impulse monitoring is wanted

A= Brown
B= Green
C= White
D= Pink
E= Red
F= Blue
G= Yellow
I= Grey
J= Black

CONNECTION OF PRESENCE ACTIVATION UNITS TO MCU

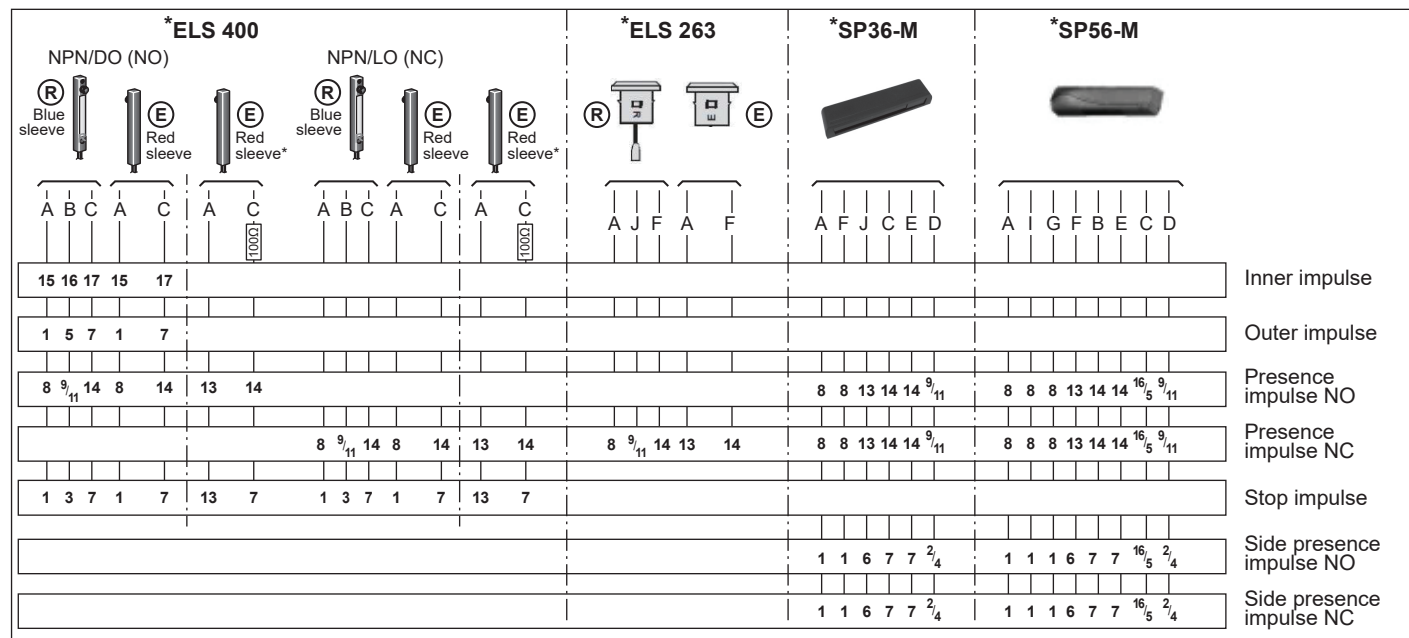

LOCK



2 (2)

Control unit

Connection drawing for SL300